


RETTEW

RETTEW Associates, Inc.
 2500 Gettysburg Rd., Suite 100, Comp Hill, PA 17011
 Phone (717) 697-3551 Fax (717) 697-6953
 Email: rettew@rettew.com
 Website: www.rettew.com
 Baltimore, MD • Bethlehem, PA • Lancaster, PA • Pottsville, PA
 Engineers • Planners • Surveyors • Landscape Architects
 Environmental Consultants

| No. | Drawing Issue Description | Date |
|-----|--------------------------------|---------|
| 1 | ISSUED FOR FINAL AMTRAK REVIEW | 6/27/08 |

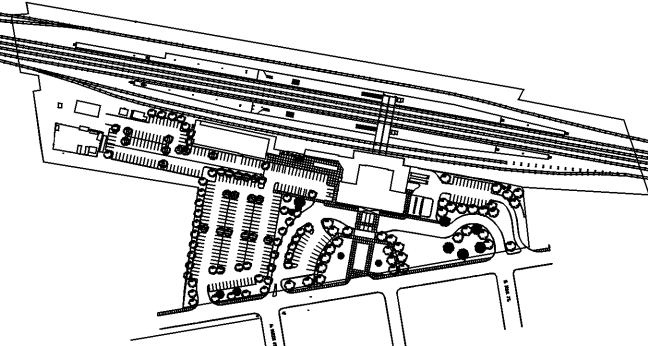

KEY PLAN
Lancaster City Station
 Lancaster, PA

Amtrak

PHASING PLAN
 PHASE 4

PHASE 4 CONSTRUCTION

1. INSTALL ALL APPROPRIATE EROSION CONTROL MEASURES AS IDENTIFIED ON THE EROSION CONTROL PLANS.
2. CONSTRUCT THE NORTHERN LANE OF THE PROPOSED ACCESS DRIVE, INCLUDING THE ENTIRE BRICK PAVEMENT SECTION, WHILE MAINTAINING THE VEHICULAR TRAVEL ALONG THE SOUTHERN PORTION OF THE EXISTING MAIN ACCESS DRIVE LOOP.
3. ONCE COMPLETED, SHIFT TRAFFIC TO THE NORTHERN LANE OF THE PROPOSED ACCESS DRIVE AND CONSTRUCT SOUTHERN PORTION OF THE PROPOSED ACCESS LANE AND THE SHORT TERM PARKING AREA.
4. CONSTRUCT LOCAL BUS CANOPY WHERE SHOWN AND COMPLETE ALL REMAINING SIDEWALK AREAS.
5. REMOVE THE TEMPORARY ENTRANCE INTO THE LONG TERM PARKING AREA.
6. CONTRACTOR SHALL MAINTAIN ACCESS TO THE PHASE I AND II AND PHASE III LONG TERM PARKING AREAS, EMPLOYEE PARKING AREAS, TRAILWAYS CANOPY AND TO THE MAIN AMTRAK TERMINAL ENTRANCE AT ALL TIMES.

| | |
|---------------------|----------------|
| Project No. | 03-05151-001 |
| Principal-in-Charge | AS NOTED |
| Project Director | Scale |
| Project Architect | MARCH 31, 2008 |
| Project Manager | Date |
| JDN | SD-17 |
| Drawn By | Drawing No. |
| File Path | |
| File Plot Date | |